





Revolution 310 S



- Fully automatic rotary laser**
- 4° self-levelling range, accuracy 0.75 mm / 10 m
  - Laser modes: spot, scan, rotary and hand receiver mode
  - Single-slope function for manual tilt of an axis in automatic operation, even if ADS tilt is active.
  - All functions can be controlled remotely using the Commander 50.
  - Laser receiver range up to 300 m radius

Optional: Systainer® version, Page 91



**Inclusive:** Revolution, SensoLite 310, universal mount, Commander 50, rechargeable battery, charger, battery holder, carrying case, batteries

ORDER NO.	EAN-CODE	PU
052.00.07A	4 021563 668557	1



SensoLite 120 set



- Laser receiver for rotary lasers**
- Laser reception range 120 m for red and green lasers
  - With head magnet
  - High-luminosity LEDs on front and rear

**Inclusive:** universal mount, battery

ORDER NO.	EAN-CODE	PU
026.50	4 021563 662845	1



SensoLite 310 set



- Laser receiver for rotary lasers**
- One LCD on the front and one on the rear
  - five-digit display, various acoustic melodies support the optical indicators
  - Extremely loud piezo buzz tone possible
  - Head and side magnets
  - Reception range 300 m for red lasers
  - 200 m for green lasers
  - Extremely durable design

**Inclusive:** universal mount, battery

ORDER NO.	EAN-CODE	PU
028.71	4 021563 663262	1



Above and below ground construction



SensoLite 410 set



High-performance laser receiver with extremely large receiving range for red and green rotary lasers

- Extremely long laser reception range for quick laser acquisition at great distances
- LC displays at front and rear. Tones indicate the level of the laser beam.
- Extremely bright 3-colour LEDs are located at the front, rear and side for remote identification.
- Versus function: The receiver monitors the reference height of the rotary laser, thus effectively preventing false measurements. Visual and acoustic signals indicate when the laser beam moves out of the reference height, e.g. as the result of external influences acting on the rotary laser.
- Extremely loud piezo buzzing sound possible
- With improved universal holder
- Strong head and side magnets
- Circular bubble level
- Receiving range for red laser up to 400 m
- Receiving range for green laser up to 400 m



Super bright signal LED: High, Low, Target

Inclusive: universal mount, battery

ORDER NO.	EAN-CODE	PU
028.75	4 021563 677214	1




SensoMaster 400 set



High performance laser receiver for rotary lasers

- 127 mm long laser receiver unit
- Millimetre exact distance reading for laser level
- Height difference to laser level is indicated by the double-sided LC display.
- Three bright LED's on the front plus, if desired, an extreme loud piezo sound show the height in relationship to the laser plane.
- Has a special protective rubber case
- Receiving range for red laser up to 400 m

Not suitable for green lasers.

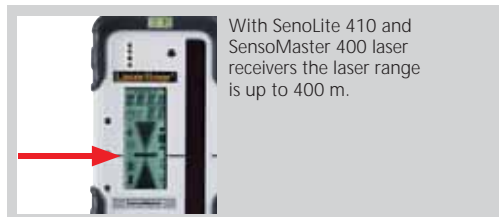

With SenoLite 410 and SensoMaster 400 laser receivers the laser range is up to 400 m.

Inclusive: universal mount, battery

ORDER NO.	EAN-CODE	PU
028.80	4 021563 663934	1

